SIVALBP VINTAGE


EXTERNAL CLADDING DARK SATURATORS

NORDIC PINE (ECOTHERMO)

THICKNESS X WIDTH
FACE COVER: 27x125 mm
WOOD SPECIE: NORDIC PINE (EcoThermo)
BOARD: Brushed solid wood

PROFILE: Tabacoa II
SHADE: Café 111
Ref. 567


sivalbp
bois, technologie & design

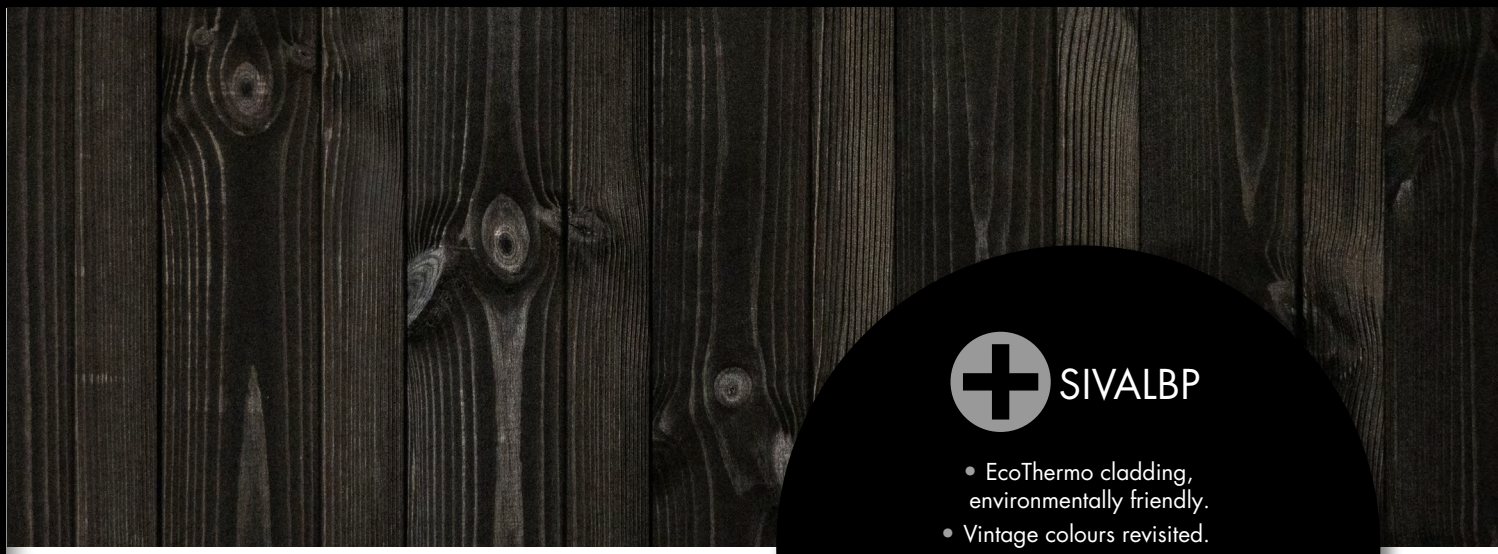


SIVALBP

- EcoThermo cladding, environmentally friendly.
- Vintage colours revisited.
- Preserves the natural look of wood.
- A protection against UV, chemical free and waterproof.
- A non film forming finish that penetrates into the wood and does not flake over time.
- Easy maintenance, allows naturally evolving wood.

PROFILE: TABACOA II 27x125



END-MATCHED



- **Rounded edges** for a better lasting of the finish.
- **Nailing line:** easy installation.
- **Secret nail** for a maximum wood moisture content of 18%.
- **Conical tongue:** better fitting and quick to install.
- **End-matched:** simplifies installation and reduces the cutting wastage.

CHARACTERISTICS

- EcoThermo solid wood board.
- **Tabacoa II profile, one secret nail on the nailing line, end-matched:** facilitates the fitting and reduces the cutting wastage.
- **Brushed surface:** it gives an optimal and texture surface; it brings out the natural grain and increases penetration and efficiency of the coating.
- Thermostabilised boards will clear up in the first weeks under the effect of UV and according to exposure and building's architecture.
- **Class 3.1 preservation, CTBB+ certified, sprayed on the 4 sides.**
- New generation preservation: **fungicide, anti-bluestain, insecticide, anti-termite**.
- Finish:
  - > **Water-based penetrating finish made with acrylic resin and natural mineral pigment (chemical free).**
  - > Industrial quality finish applied under strictly controlled factory conditions, ensuring consistent and unifrom application.
  - > Application of a finish on the reverse side ensuring a good balance of the board.
  - > The durability of the wood is guaranteed for 10 years with preservation.
- The Sivalbp-**Vintage** finish allows to delay the natural ageing process for minimum 3 years, according to exposure and building's architecture. Nordic Pine, lasting up to 50 years.
- **Product complies with DTU 41.2 (French text) and has an individual certificate CTB Ecothermo Siding No.534-26-2001.**

SHADE: CAFÉ 111



WOOD SPECIE: NORDIC PINE (ECOTHERMO)

Nordic Pine: Scandinavian timber, lasting up to 50 years, 3 class thanks to thermostabilisation, **PEFC certified (PEFC/10-31-1593)**. Exceptional durability and stability.

PEFC 10-31-1593
Promoting Sustainable Forest Management
www.pefc-france.org

CTB CERTIFIÉ PAR FCBA BARDAGE ECOTHERMO CERTIFICATION INDIVIDUELLE N° 534

Eco Thermo by Sivalbp

- Friendly environmentally process and chemical free
- Exceptional durability and stability
- Better resistance to the weather

MADE IN FRANCE

FDES VÉRIFIÉE inies

CTBB+ CERTIFIÉ PAR FCBA BOIS PRÉSERVÉS

CE NF EN 14915
All our boards are compliant with CE marking

NORDIC PINE (ECOTHERMO)

Thickness x width face cover: 27x125 mm
Brushed solid wood - Tabacoa II - Café 111 - Ref. 567

WOOD SPECIE	THERMAL PROCESS	DURABILITY	TECHNICAL PROPERTIES		
Nordic Pine Geographical area: Scandinavia Quality: A/B choice NF EN 14519 Thanks to the thermostabilisation, Nordic Pine becomes an excellent material for an external use. PEFC certified **Carbon footprint:** 6.29 kg CO_2 eq./m² (module D excluded)*	**Thermostabilisation** Ecological process, environmentally friendly and chemical free. It consists in moisturising and heating the wood to high temperature. This process gives the boards exceptional durability and stability and greatly reduces the shrinkage phenomenon. The wood acquires an even, brown colour all the way through and neutralizes resin exudation.	**Use class: 3.1** with the Sivalbp preservation certified CTB B+ Nordic Pine, lasting up to 50 years	**Behavioural fire restrictions** EUROCLASSE D-s3, d0 for reaction to fire (according to 14915+A1 : 2017 EN NF standard) Combustible mass in MJ/m²: 136	**Thermal characteristics according to NF EN 12 524** Thermal resistance R in m². K/W: 0,13	**Water vapour permeability according to NF EN 12 524** Water vapour resistance: 72 µ Average density: 520 kg/m³ to 12% wood moisture content

* Consult our Environmental and Health Declaration Sheets on the INIES database

MECHANICAL PROPERTIES					
Breaking stress in compression: NC* Nm/mm²	Breaking stress in tension: NC* Nm/mm²	Breaking stress in shear: NC	Breaking stress in bending: NC N/nm²	Modulus of elasticity in bending: NC N/mm²	Compliant for French implementation in Q4 area (impact resistance)

PREPARATION FINISH	SHADE	THICKNESS X WIDTH FACE COVER IN MM	BOARD	LENGTHS (M)* (according to availability)	FITTING	PACKAGING
Brushed solid wood 1 coat of wood preservative 3.1 use class on the four sides: 100 g/m² 1 coat penetrating finsih on the side: 120 g/m² 1 coat of white paint on the reverse side: 50 g/m²	**Café 111**	27x125 mm	Brushed solid wood	3.60 - 3.90 - 4.20 - 4.50 - 4.80 - 5,10 m	1 secret nail on the nailing line (find installation advice below)	Packs x boards/pack: 48x4

*For solid wood boards with end-matched, the effective length is equal to the standard supply length invoiced minus 30 millimeters.
NPD: not performance declared. NC: non communicated.

INSTALLATION ADVICES

To ensure the products are correctly installed, the rules laid out in the French code of practice DTU 41.2 for external cladding, and our Technical Guide, should be observed.

- Store the boards in a dry place, sheltered from the elements and ventilated.
- **Vertical installation only:** mandatory double battening.
- Cladding must be fixed on batten with a minimum of 27 mm thickness (32 mm for UK).
- They must be attached at a minimum of 40 cm and a maximum of 65 cm apart (60 cm for UK).
- A waterproof membrane satisfying the standard must be installed (except for walls which are already watertight, solid concrete walls).
- **Mandatory air gap** behind Sivalbp cladding to ensure a good ventilation. The air outlets must be at the base and the top of the cladding elevation.
- Ensure a minimum of 20 cm above ground clearance.
- Assembly by interlocking (end-matched on the 4 sides).
- Fastening with **stainless steel screws or stainless steel tips**, twisted or ringed – 1 secret nail fixed on the nailing line.
- The head of the nails or screws must not penetrate further than 1 mm into the boards.
- **All the cuts must be touched up with Sivalbp-Vintage paint.** We also recommend that the ends of the boards should also be treated.

ACCESSORIES AND FINISH CUTS TOUCH UP

- Accessories available in 1 shade: café 111
- Available finish cuts touch up in tins of 1L and 5L : all cuts must be touched up (see French DTU 59.1)

Profile		
Product	Complex corner trim	Board
Surface finish	Sanded finger-jointed	Sanded glulam
Thickness x width face cover in mm	67x55	25x270

MAINTENANCE

- To maintain the shine of the colors, clean annually by lightly brushing the surface (avoid high pressure cleaners).
- The Sivalbp-**Vintage** finish does not flake. Color renovation made easier without stripping or sanding, if necessary and depending on the building's exposure and architecture.
- As soon as necessary, apply the Sivalbp-**Vintage** saturator directly with a spray gun or brush in 1 or 2 coats to re-saturate the wood fibers.
- A sustained finish will help to preserve the cladding.
- We advise you to contact a professional who will apply the appropriate renovation procedure.

GENERAL REMARK

White marks may appear on the boards upon installation. This phenomenon, caused by an excess of nacre, is well known and does not affect the durability of the façade. These marks are purely aesthetic and naturally fade after a few months of UV exposure. However, if needed, they can be easily removed with a simple wipe of a cloth.