



# NORDIC SPRUCE

THICKNESS X WIDTH  
FACE COVER: 20x185 mm  
WOOD SPECIE: Nordic  
Spruce  
BOARD: Brushed solid wood


PROFILE: Micro 2 TG 12mm  
SHADE: cérusé blanc 601  
Ref. A58

**sivalbp**<sup>®</sup>  
bois, technologie & design



Myotte-Duquet Habitat (25)


## PROFILE: MICRO 2 TG 12mm 20x185



- **Easy installation:** fastening primer.
- **End-matched:** simplifies installation and reduces the cutting wastage.

## CHARACTERISTICS

- 12% dried solid wood board for indoor use.
- **Brushed surface:** it gives an optimal and texture surface; it brings out the natural grain of the wood.
- Wide boards.
- Finish:
  - > Hydrowax based on acrylic resin with excellent impregnation.
  - > Solvent-free finish in aqueous phase: cérusé blanc 601.

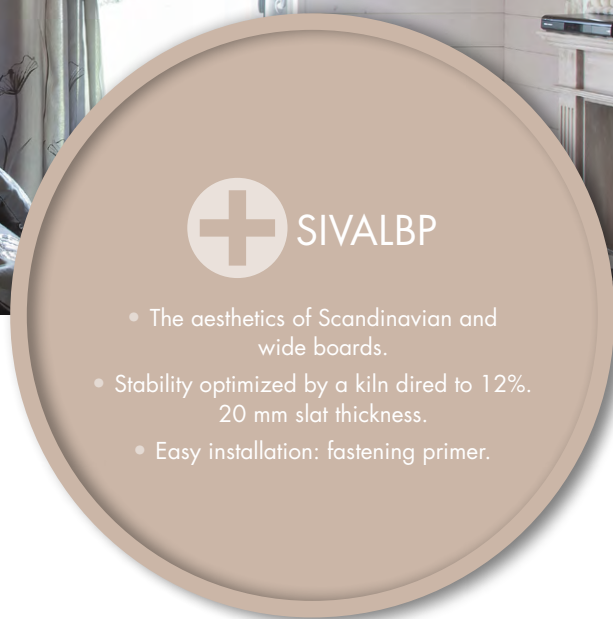

- The aesthetics of Scandinavian and wide boards.
- Stability optimized by a kiln dried to 12%.  
20 mm slat thickness.
- Easy installation: fastening primer.

## SHADE: CÉRUSÉ BLANC 601



## WOOD SPECIE: NORDIC SPRUCE

**Nordic Spruce:** Scandinavian timber, **PEFC certified (PEFC/10-31-1593)**. This is the material of choice in terms of quality and stability.  
It is selected for its light fine grained wood, and its slow growth. It reveals small knots which are well integrated into the structure.





| WOOD SPECIE                                                                                                                |                                      | THERMAL PROCESS                                                    | DURABILITY                                | TECHNICAL PROPERTIES                                                                                     |                                                                     |                                                                    |
|----------------------------------------------------------------------------------------------------------------------------|--------------------------------------|--------------------------------------------------------------------|-------------------------------------------|----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|--------------------------------------------------------------------|
| Nordic Spruce                                                                                                              |                                      | Kiln dried to 12% (+/- 2%)<br>guaranteeing the stability of boards | Use class: 2<br>(according to FD P20-651) | Behavioural fire restrictions                                                                            | Thermal characteristics according to NF EN 12 524                   | Water vapour permeability according to NF EN 12 524                |
| Geographical area: Scandinavia<br>Quality: A/B choice NF EN 14519                                                          |                                      |                                                                    |                                           | EUROCLASSE D-s3, d0 for reaction to fire<br><small>(according to 14915+A1 : 2017 EN NF standard)</small> | Thermal resistance R in m². K/W: 0,12                               | Water vapour resistance: 66 µ                                      |
| PEFC certified                                                                                                             |                                      |                                                                    | Nordic Spruce, lasting up to 50 years     | Combustible mass in MJ/m²: 156                                                                           |                                                                     | Average density: 475 kg/m³<br>to 12% wood moisture content         |
| MECHANICAL PROPERTIES                                                                                                      |                                      |                                                                    |                                           |                                                                                                          |                                                                     |                                                                    |
| Breaking stress in compression: 45 N/mm²                                                                                   | Breaking stress in tension: 85 N/mm² | Breaking stress in shear: 6                                        |                                           | Breaking stress in bending: 71 N/mm²                                                                     | Modulus of elasticity in bending: 12 000 N/mm²                      | Compliant for French implementation in Q4 area (impact resistance) |
| PREPARATION FINISH                                                                                                         | SHADE                                | THICKNESS X WIDTH<br>FACE COVER IN MM                              | BOARD                                     | LENGTHS (M)*<br><small>(according to availability)</small>                                               | PACKAGING                                                           |                                                                    |
| Brushed solid wood<br>1 coat penetrating finsh on the side: 120 g/m²<br>1 coat of white paint on the reverse side: 50 g/m² | cérusé blanc 601                     | 20x185                                                             | Brushed solid wood                        | 2.52 m                                                                                                   | Packs x boards/pack: 30 x 4<br>Average pallet in m² L 2.52 m: 55 m² |                                                                    |

\*For solid wood boards with end-matched, the effective length is equal to the standard supply length invoiced minus 30 millimeters.

## INSTALLATION ADVICES



To ensure the products are correctly installed, the rules laid out in the French code of practice DTU 36.1 for internal cladding, and our Technical Guide, should be observed.


- Store the boards for a few days before installation, laid horizontally in open stacks in the room where they are to be installed.
- **Preparation:** install the internal cladding on a perfectly dry support, avoid direct contact with the floor.
- **Particular care should be taken when installing the first board, as this board serves as a reference for the following.**
- Easy installation thanks to the grooved ends.
- Solid wood boards are attached to battens fitted a maximum of 40cm apart and which allows the air to circulate.
- The purpose of the air gap thus created is to allow moisture and any steam condensation which has passed through the wall to escape. This air gap is essential in damp environments such as kitchens, bathrooms or sheltered outdoor areas. The air gap must be at least 10mm everywhere on the wall.
- Installation in damp rooms is possible if an adequate ventilation is ensured (windows, CMV,...).
- The wainscot mustn't be directly in contact with the water.
- Installation of the battens also allows thermal acoustic insulation to be inserted and wiring to be hidden if necessary (while maintaining the air gap).
- Ensure the boards are aligned and correctly slotted together.

### SOME RULES FOR NAILING


- Nail the boards on each batten.
- The nails must be at least 3.5 times longer than the thickness of the lower edge of the board. To avoid splitting, use nails with a shank less than 3.5 mm in diameter.
- Nailing at an angle improves pull-out resistance.

## TYPE AND DIRECTION OF INSTALLATION

### Horizontal installation

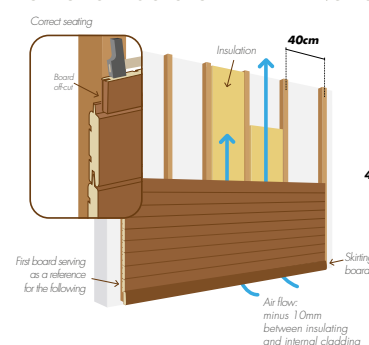

### Vertical installation



### Internal cladding installation

- Wainscot can be installed horizontally, vertically or obliquely, on wood walls or masonry walls.

## MAINTENANCE

- Nordic Spruce wainscot does not need particular maintenance.
- Proceed to dust regularly.



Find all of  
our **DOCUMENTATION**  
on our website: [sivalbp.fr](http://sivalbp.fr)



Get our installation advice  
in the SIVALBP  
**TECHNICAL GUIDE**



Download our **MAINTENANCE**  
**BOOKLET** for our maintenance  
recommendations

**sivalbp**  
bois, technologie & design